

# VAPURE

SALT AND MINERAL CHLORINATOR

## SIMPLY RELIABLE

SALT OR MINERAL SALT COMPATIBLE

MULTI-FUNCTION MENU SYSTEM

EASY TO USE TOUCH PAD

EFFICIENT CHLORINE  
PRODUCTION

ULTRA LONG LIFE  
SELF-CLEANING CELL

FULLY AUTOMATED

SIMPLE SET UP AND  
OPERATION

QUICK CONNECT CELL

HORIZONTAL OR VERTICAL  
INSTALL OPTION WITH  
CELL HOUSING

VARIABLE SPEED PUMP  
COMPATIBLE

SMART TEMPERATURE  
SENSORS (POWER  
SUPPLY & WATER)

EASY INSTALLATION  
TO NEW OR EXISTING  
POOLS




# VAPURE

SALT AND MINERAL CHLORINATOR

## FEATURES

- **LOW SALT OPERATION:**  
3000-3500PPM (0.3%-0.35%)  
WITH BUILT IN SELF-REGULATOR  
FOR HIGH SALT
- **FRESHWATER OPTION AVAILABLE**  
IN VP25LS MODEL <1500PPM  
(<0.15%)
- **BAGLIT LCD INTERFACE**  
DISPLAYING DETAILED OPERATOR  
INSTRUCTIONS CLEARLY
- **SMART SELF-CLEANING**  
CELL ELECTRODE
- **PREMIUM GRADE QUICK CONNECT**  
TITANIUM CELL FOR INCREASED  
LIFESPAN
- **BACKWASH, SUPER CHLORINATE**  
AND WINTER MODE FUNCTIONS
- **SINGLE OR DUAL TIMER CYCLES**
- **BUILT IN SALT/TDS TEST,**  
WATER FLOW AND PROTECTION
- **AUTOMATIC BATTERY BACK-UP**  
TIMER
- **MODERN, SLIM LOOKING**  
POWER PACK
- **SUITABLE FOR ALL POOL**  
SURFACES (CONCRETE,  
FIBREGLASS, VINYL & TILED)

## CHLORINATOR SIZING CHART

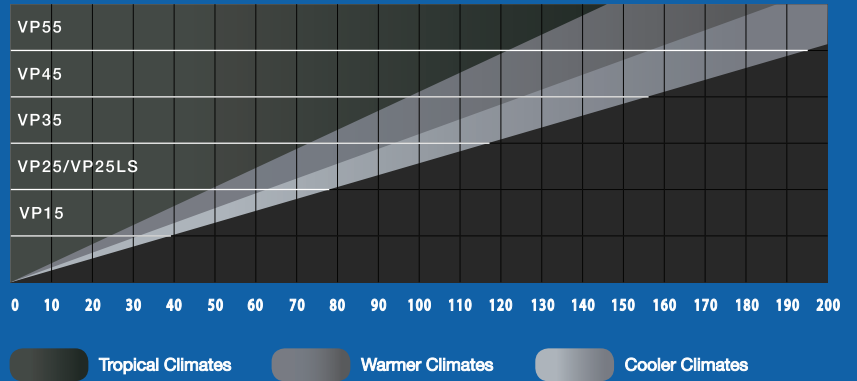

Sizing Chart provided as a guide only. Consult your Local CAS dealer for the correct systems, size and specification to suit your needs.

## CHLORINE PRODUCTION

Model	Per Hour			Over 8 hours		
	Chlorine Output	Cal.hypo Equivalent (65%)	Sod.hypo. Equivalent (12.5%)	Chlorine Output	Cal.hypo Equivalent (65%)	Sod.hypo. Equivalent (12.5%)
VP15	15g	23g	120ml	120g	184g	960ml
VP25	25g	38g	200ml	200g	304g	1600ml
VP25LS	25g	38g	200ml	200g	304g	1600ml
VP35	35g	54g	280ml	280g	432g	2240ml
VP45	45g	69g	360ml	360g	552g	2880ml
VP55	55g	85g	440ml	440g	680g	3520ml

## SPECIFICATION TABLE

Model	VOLTS (Vac) Input	AMPS* (Aac) Input	Power Consumption (Watts)	VOLTS* (Vdc) Output	AMPS* (Adc) Output	Frequency (Hz)	Weight (kg)	Dimensions (cm)
VP15	210 - 265	0.86	204.7	7.57	15.0	50/60	9.7	41L x 35W x 19H
VP25	210 - 265	1.25	293.0	7.38	25.0	50/60	11.1	41L x 35W x 19H
VP25LS	210 - 265	1.25	293.0	7.38	25.0	50/60	11.1	41L x 35W x 19H
VP35	210 - 265	1.06	244.9	8.02	17.5	50/60	12.8	41L x 35W x 19H
VP45	210 - 265	1.30	292.2	7.98	22.5	50/60	13.5	41L x 35W x 19H
VP55	210 - 265	1.78	413.0	8.73	27.5	50/60	14.2	41L x 35W x 19H

Optional Extra: 15 000hr Heavy Duty Anode. Use HD on end of model number and specify when ordering.



SYDNEY - Unit 4, 1 Prosperity Parade, Warriewood NSW 2102 Ph: (02) 9979 3490 Toll Free: 1300 731 905

Email: sales@poolranger.com.au Website: www.poolranger.com.au

WA - Unit 1 / 4 White Street, Bayswater WA 6053 Ph: 08 9375 7450 Email: will@poolranger.com.au